



LF415M10-54H

- LF395M10-54H
- LF400M10-54H
- LF405M10-54H
- LF410M10-54H

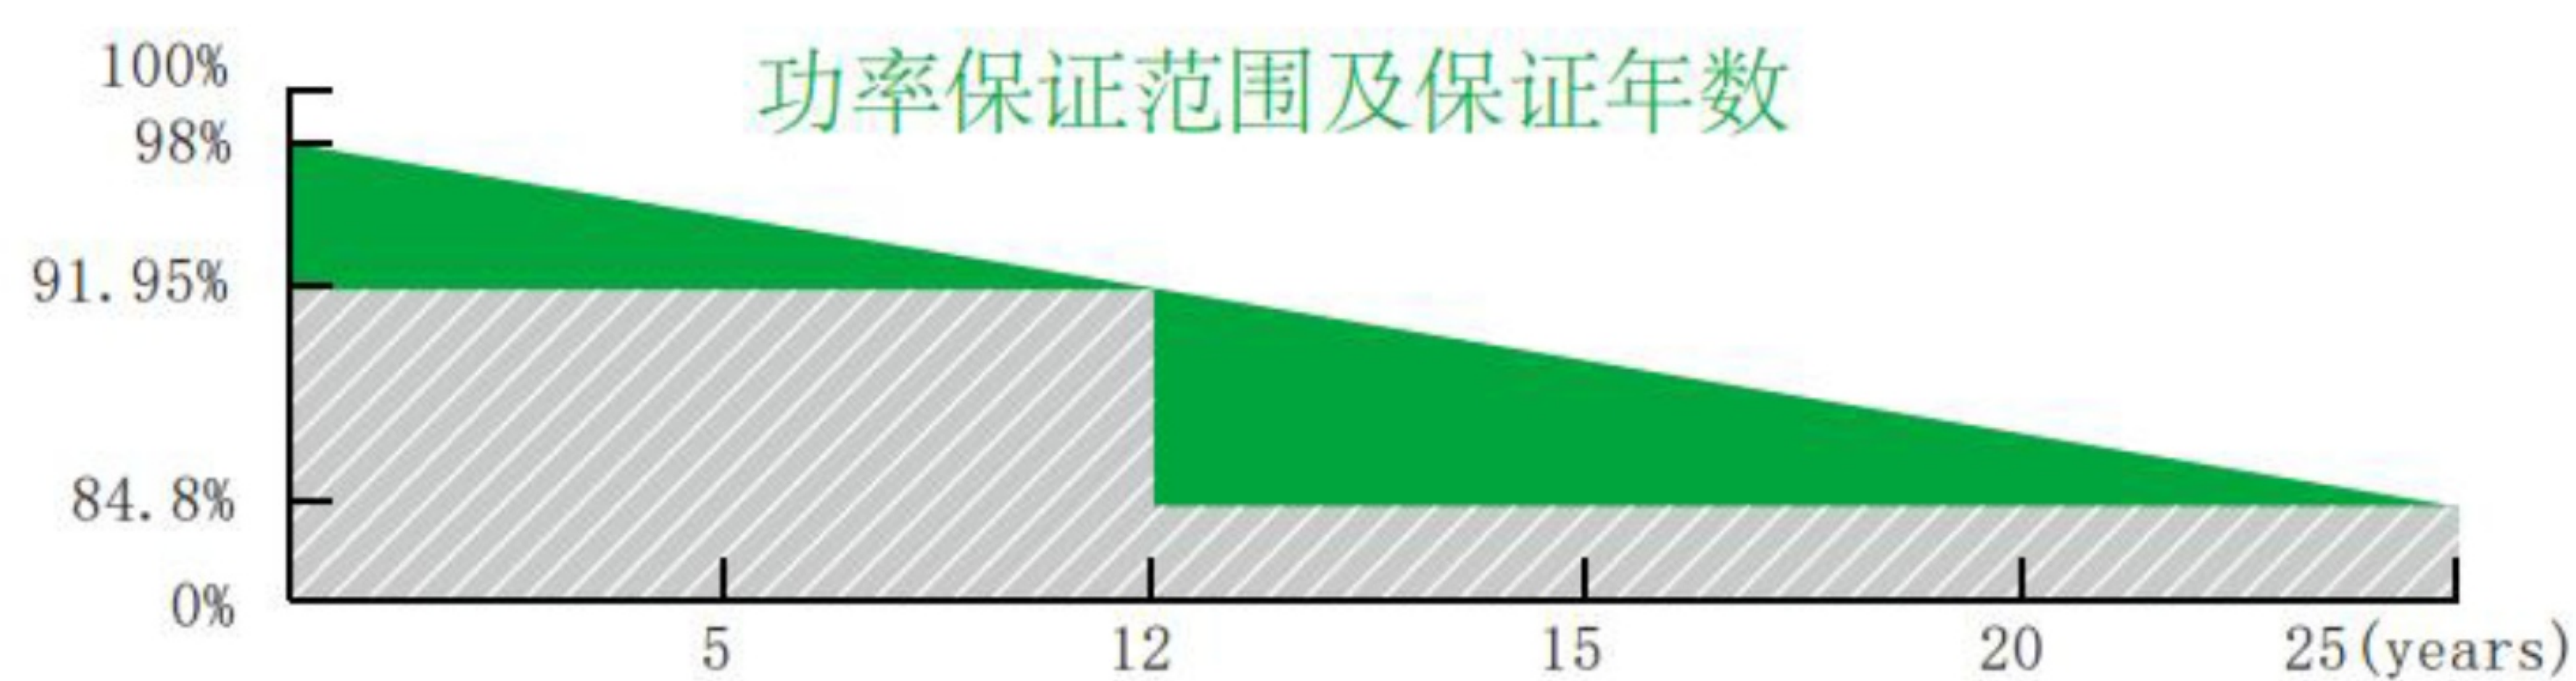

宁波乐丰新能源有限公司

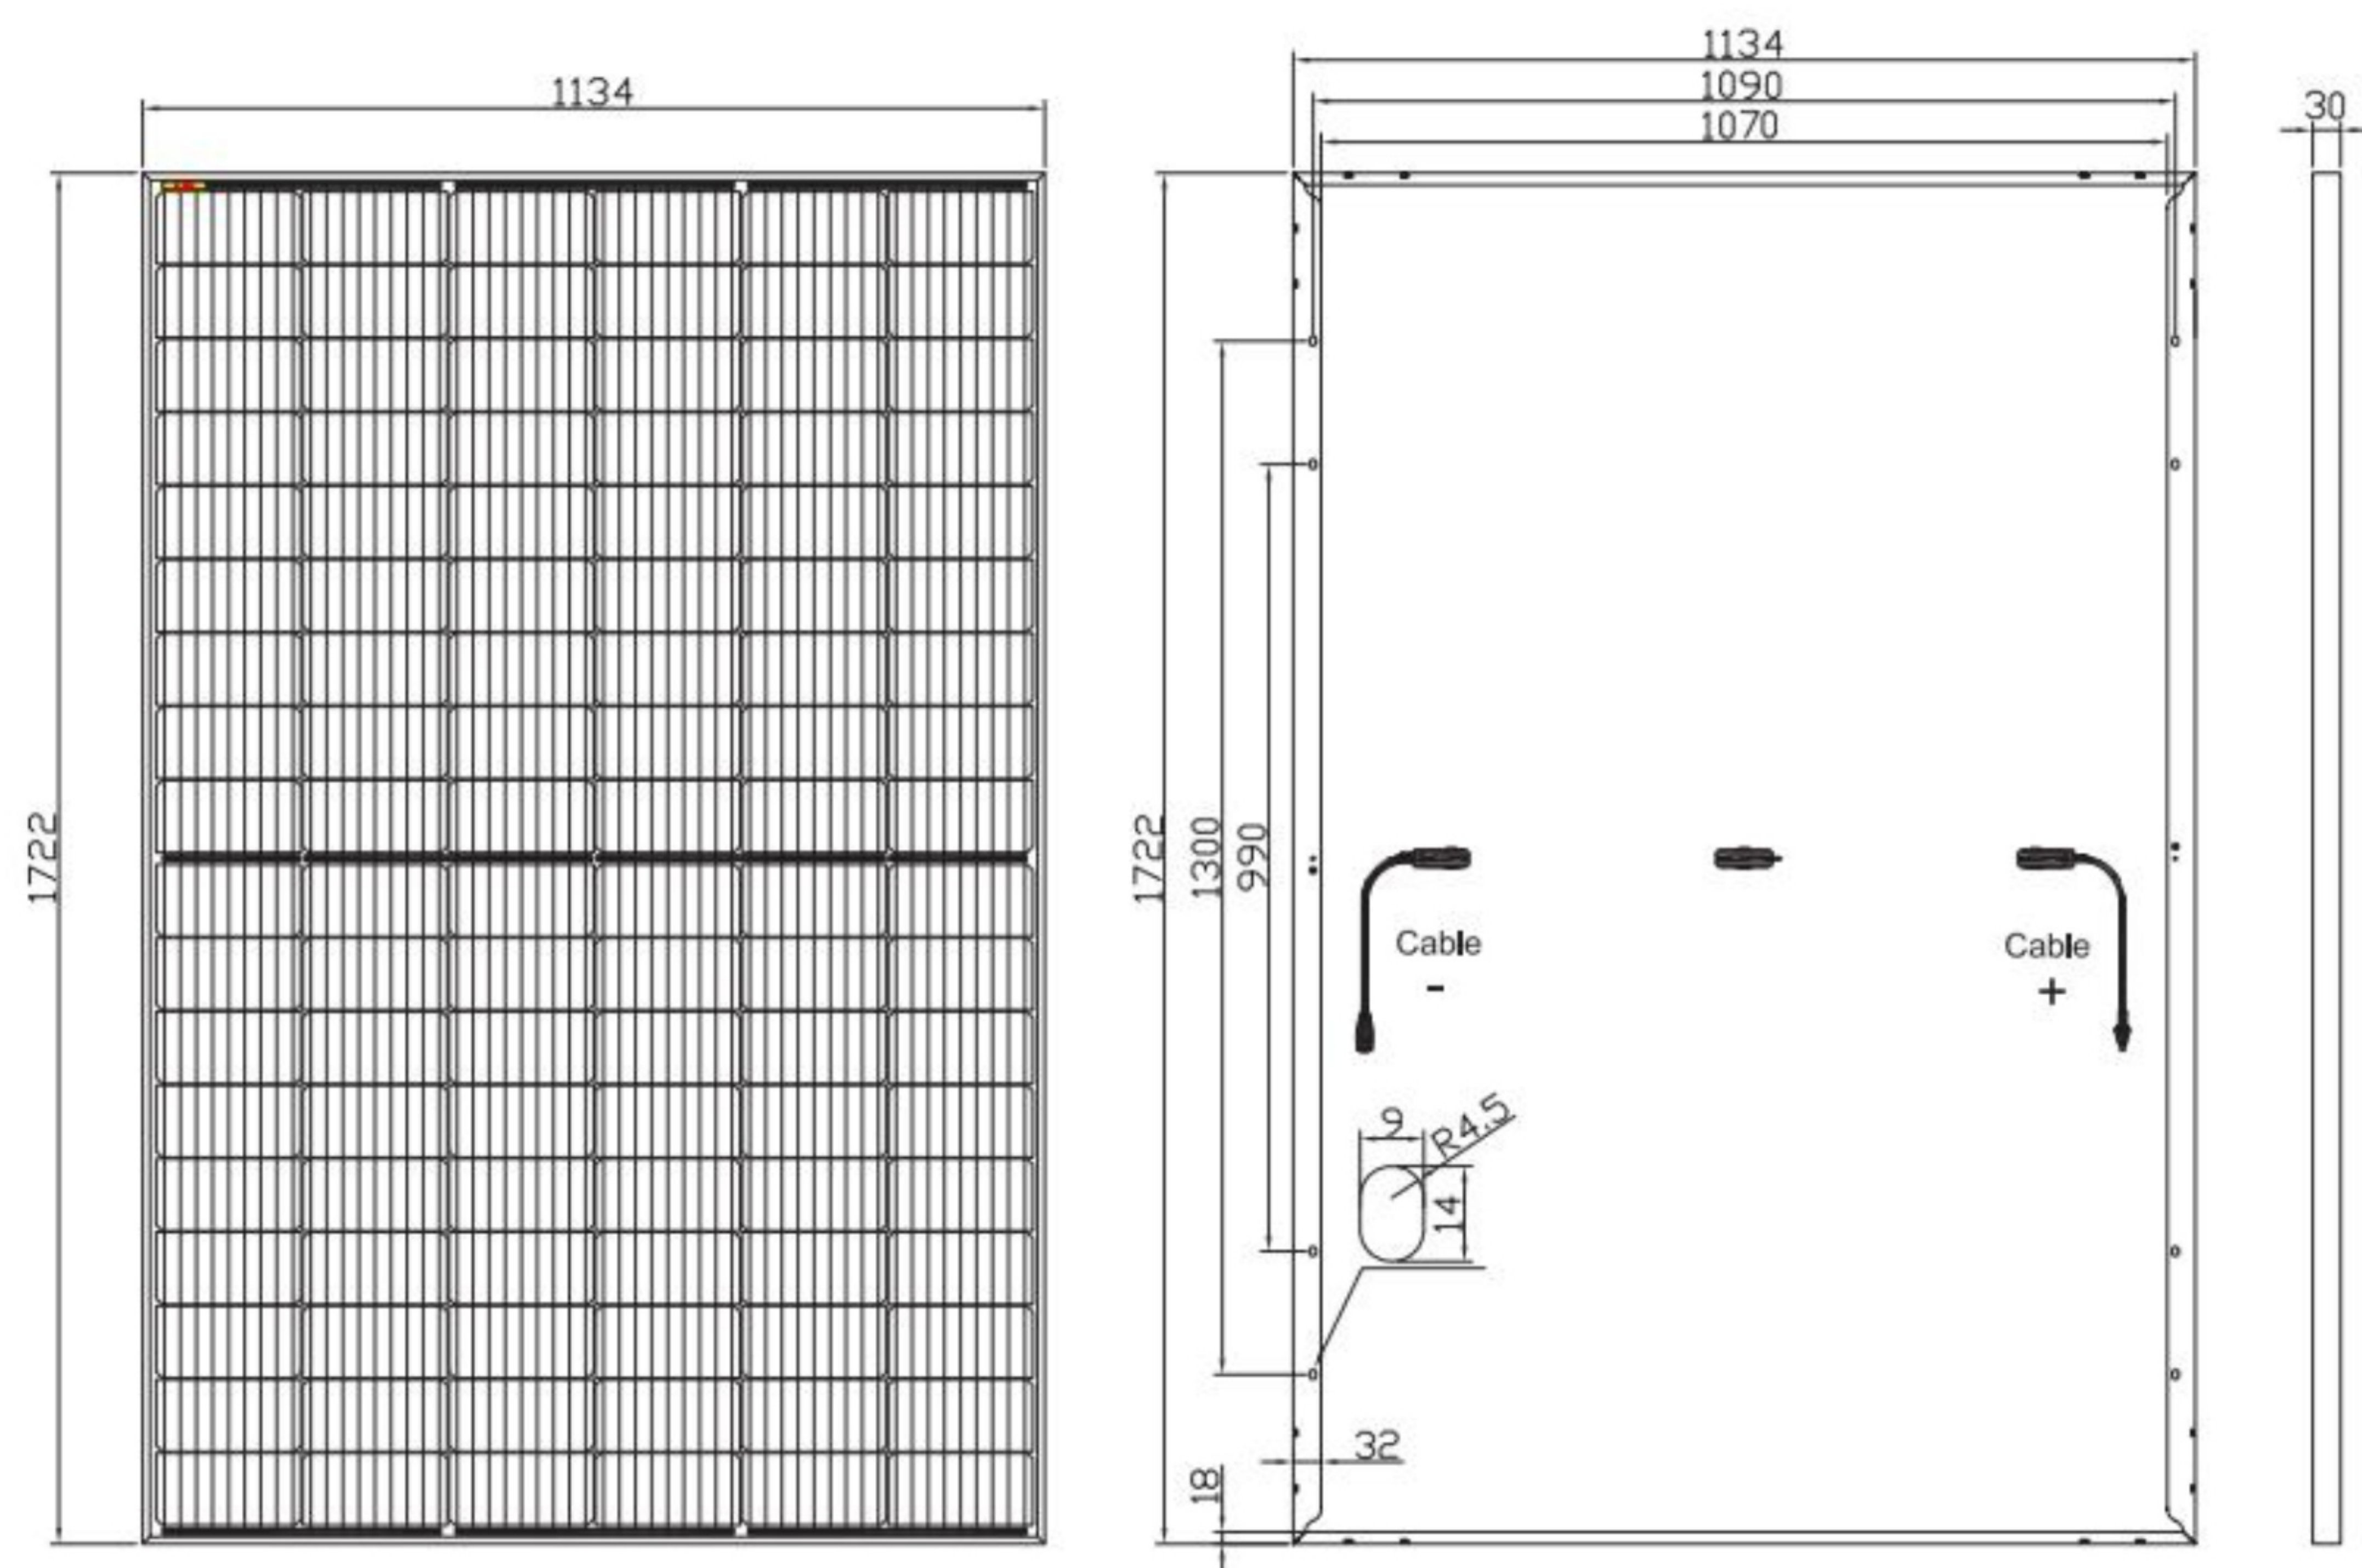

功率保证范围及保证年数

12 年

工艺及材料
质量保证

25 年

84.8%输出
功率保证



ISO9001
ISO14001
OHSAS18001



高效组件



最大5400Pa
机械载荷



耐盐雾耐氨腐蚀



抗电位诱导衰减

宁波乐丰新能源有限公司

电话: +86-0574-25709777

电话: +86-0574-25758826

邮箱: Sales@lefn-solar.com

地址: 中国浙江省宁波市象山县滨海工业园区海和路55号



LF415M10-54H

- LF395M10-54H
- LF400M10-54H
- LF405M10-54H
- LF410M10-54H



宁波乐丰新能源有限公司

电性能参数

型号	LF 395M10-54H	LF 400M10-54H	LF 405M10-54H	LF 410M10-54H	LF 415M10-54H
最大输出功率	395	400	405	410	415
最大输出功率公差	0-5W	0-5W	0-5W	0-5W	0-5W
组件效率(%)	20.2	20.5	20.7	21.0	21.3
最大工作电压(V)	30.83	30.98	31.23	31.44	31.60
最大工作电流(A)	12.81	12.91	12.97	13.04	13.13
开路电压(V)	36.92	37.10	37.33	37.58	37.77
短路电流(A)	13.61	13.80	13.87	13.94	14.03
最大输出功率	303.45	307.29	311.13	314.97	318.81
最大工作电压(V)	28.10	28.25	28.46	28.66	28.81
最大工作电流(A)	10.80	10.88	10.93	10.99	11.07
开路电压(V)	34.08	34.25	34.46	34.69	34.87
短路电流(A)	11.55	11.64	11.70	11.76	11.84
短路电流温度系数 (%/°C)	0.046				
开路电压温度系数 (%/°C)	-0.266				
功率温度系数 (%/°C)	-0.354				
组件标称工作温度NMOT (°C)	43±3°C				

机械性能参数

组件尺寸	1722*1134*30mm
重量(Kg)	21.5
线缆	4mm ²
玻璃	高透钢化玻璃3.2mm
接线盒	IP68, 3个旁路二极管, 线长300mm
接线端子型号	兼容MC4接头

包装配置


集装箱承载	216 件 /20GP
	936 件 /40HC

联系信息

工作性能参数

最大系统电压	1500V
最大系列保险丝额定值	25A
机械载荷	5400Pa
工作温度(°C)	-40~+85
应用等级	A

不同辐照度I-V曲线

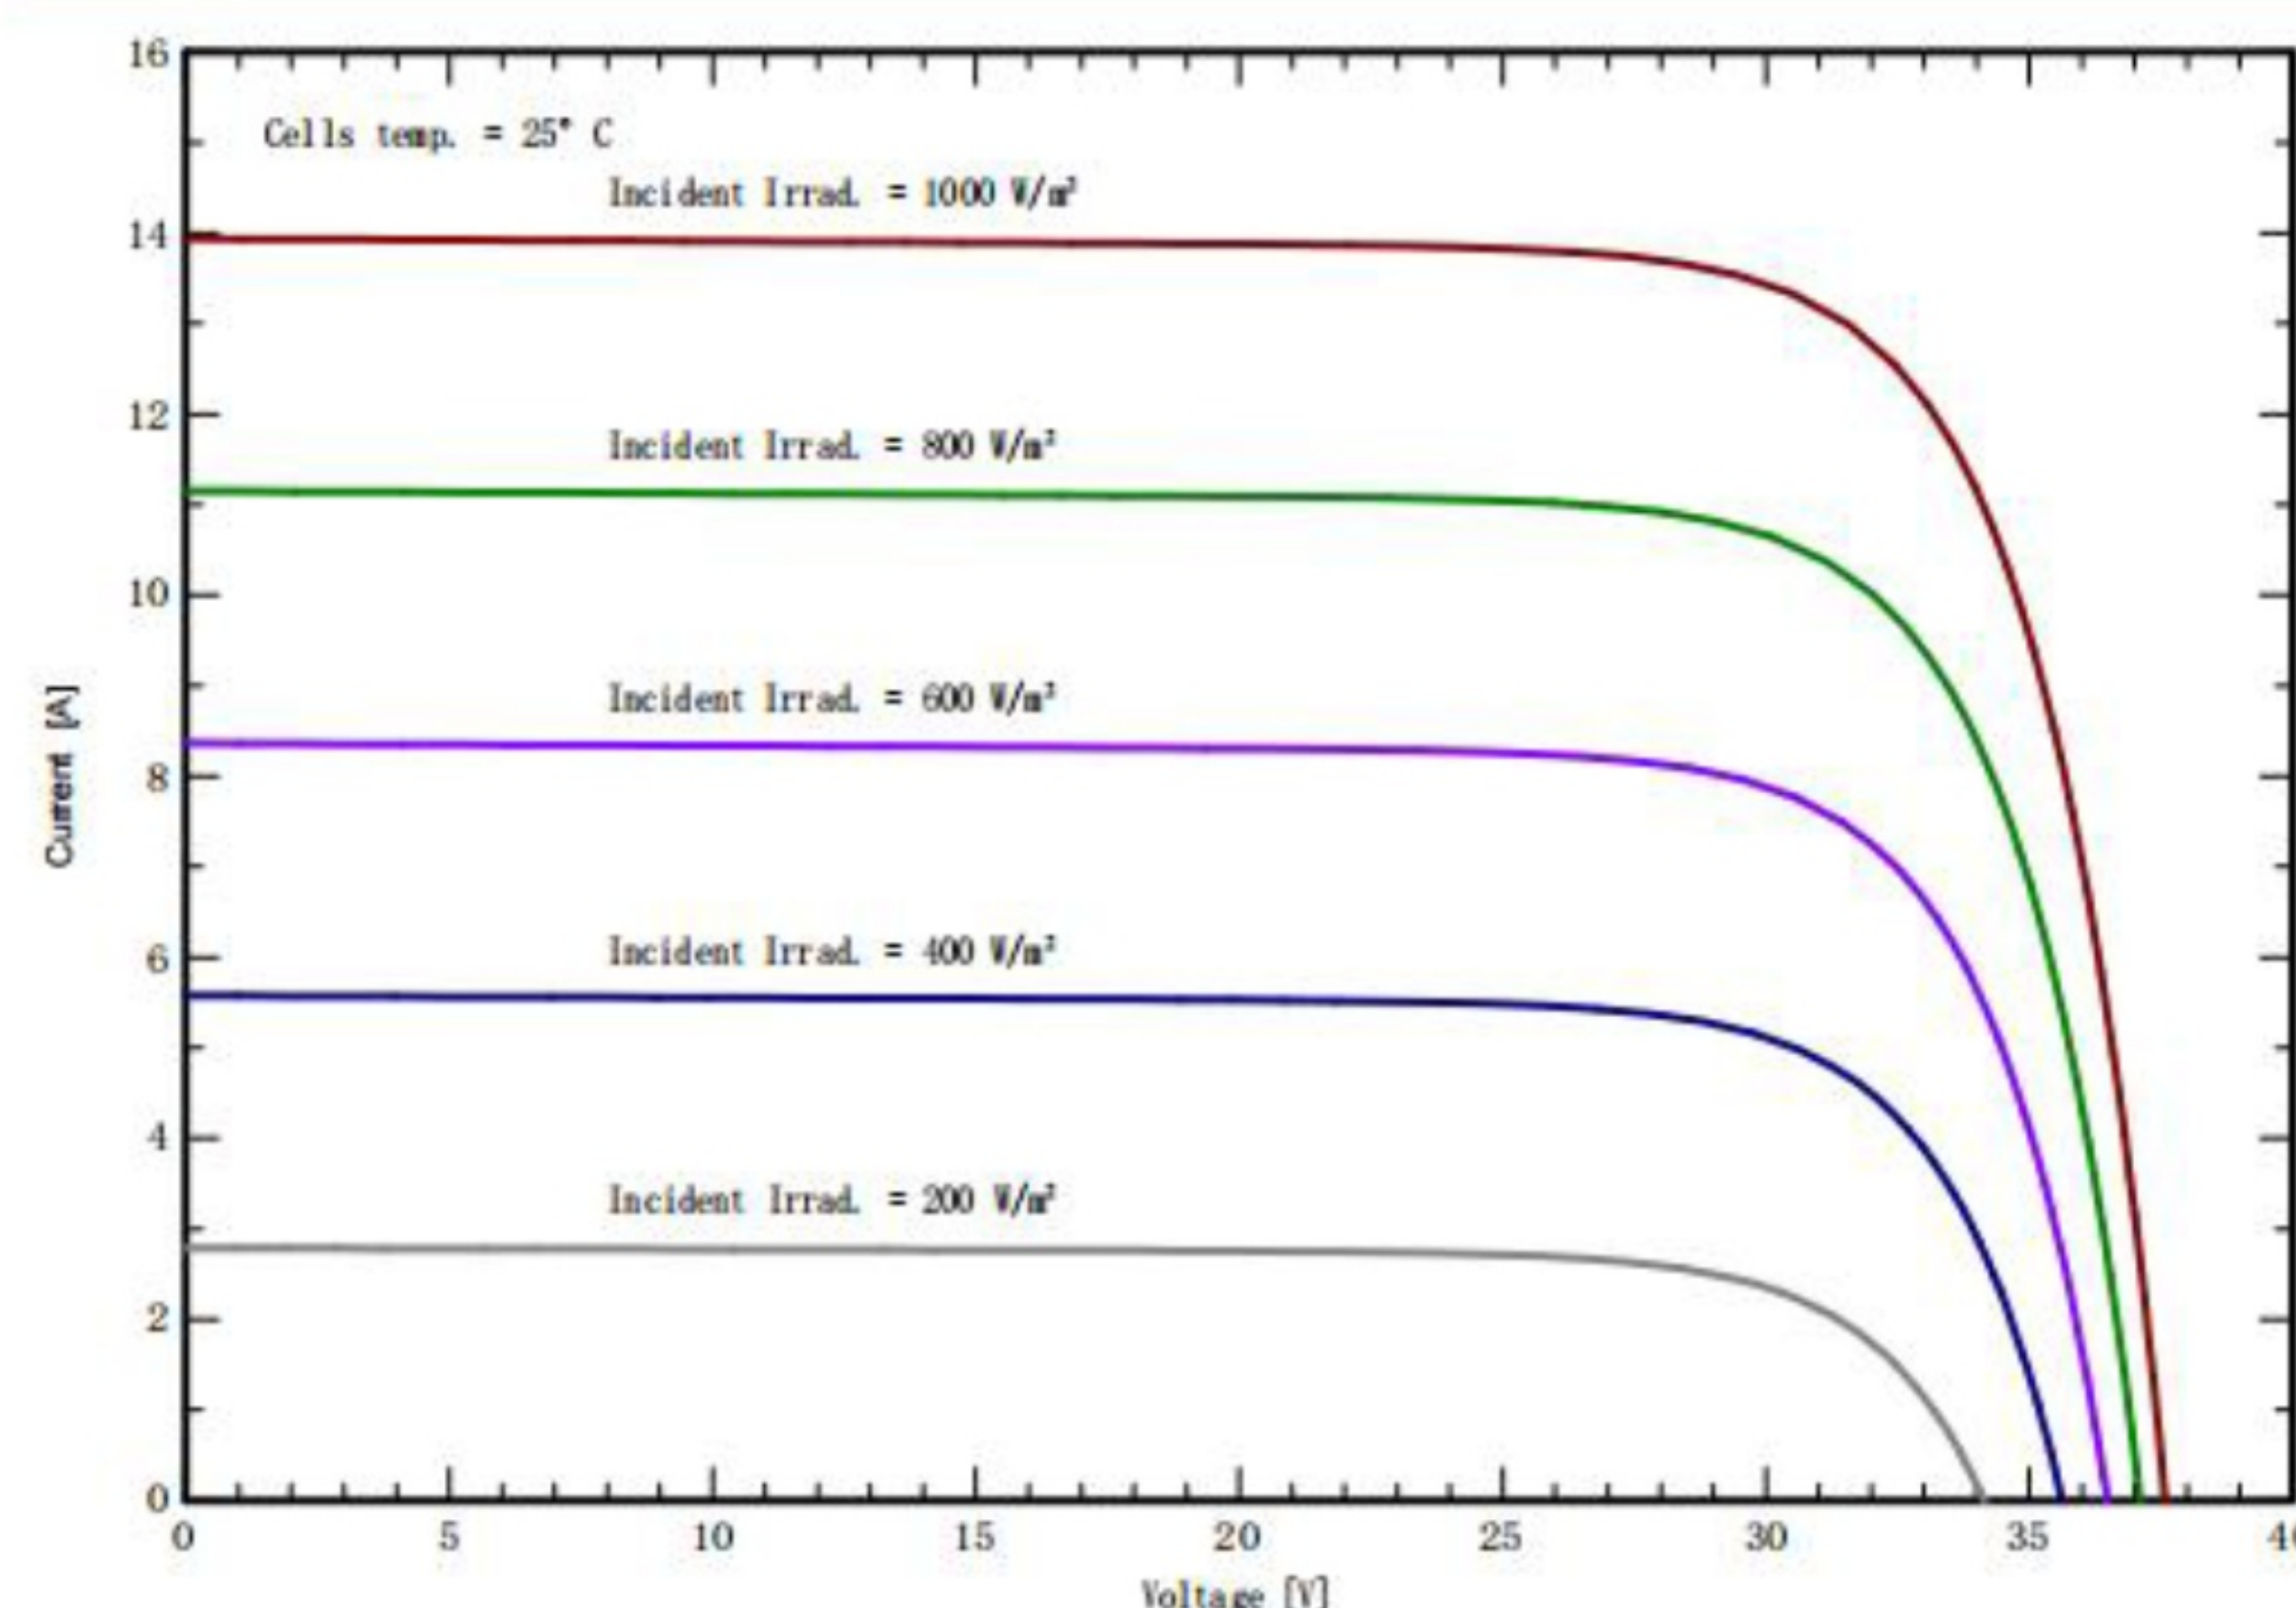

宁波乐丰新能源有限公司

电话: +86-0574-25709777 电话: +86-0574-25758826

邮箱: Sales@lefn solar.com

地址: 中国浙江省宁波市象山县滨海工业园区海和路55号

